

## Tube and Coupler Scaffolds — Erection and Use

Workers building scaffolds risk serious injury from falls and tip-overs, being struck by falling tools and other hazards, and electrocution from energized power lines. Before starting any scaffold project, the employer should conduct a hazard assessment to ensure the safety of workers.

A tube and coupler scaffold has a platform(s) supported by tubing, and is erected with coupling devices connecting uprights, braces, bearers, and runners (see Fig. 1). Due to their strength, these scaffolds are frequently used where heavy loads need to be carried, or where multiple platforms must reach several stories high. These scaffolds can be assembled in multiple directions, making them the preferred option for work surfaces with irregular dimensions and/or contours.

### When Erecting a Scaffold

- Use footings that are level, sound, rigid and capable of supporting the load without settlement or displacement.
- Plumb and brace poles, legs, posts, frames, and uprights to prevent swaying and displacement.
- Position the first level of bracing as close to the base as possible.
- Plumb and level the scaffold as it is being erected.
- Fasten all couplers and/or connections securely before assembling the next level.
- Install guys, ties, and braces according to the manufacturer's recommendations.
- Do not intermix scaffold components from different manufacturers, unless you can do so while maintaining the scaffold's structural integrity.
- When platform units are abutted together to create a long platform, each abutted end must rest on a separate support surface.
- Once erected, provide toeboards on all railed sides to prevent falling object hazards.

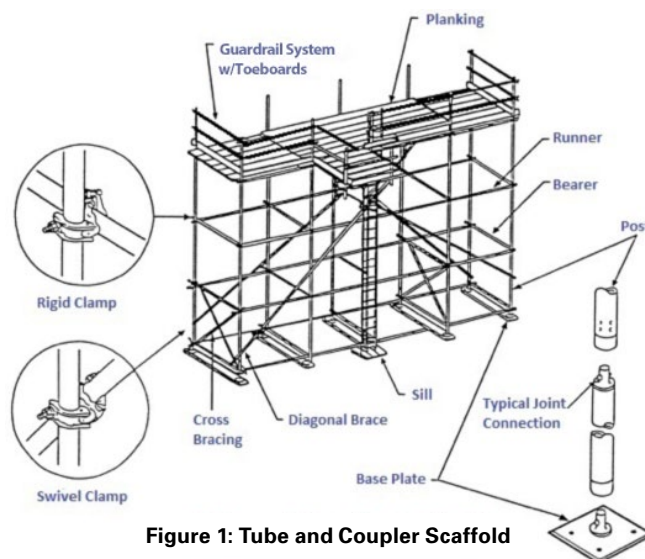


Figure 1: Tube and Coupler Scaffold

### When Using a Scaffold

- Make sure that a competent person inspects the scaffold before each work shift.
- If during the inspection a defect or damage to the scaffold is discovered, the scaffold must be tagged out and not used until repairs are made. Attach tags at the access point to the scaffold.

One common tagging system uses the following tags:

**Red** tag indicates: unsafe, do not use.

**Green** tag indicates: ready to use.

- Use scaffolds according to the manufacturer's instructions.
- Never load a scaffold beyond its maximum intended load or rated capacity.
- Do not use makeshift methods to increase the working height of the scaffold platform, such as with ladders, buckets or blocks.

- Employees must not work on platforms covered with snow, ice, or other slippery material.
- The employer must provide suitable access to and between scaffolds, such as portable ladders, hook-on ladders, attachable ladders and stairway-type ladders.

### When Dismantling a Scaffold

Check to ensure that the scaffold has not been structurally altered in a way which would make it unsafe. Before beginning dismantling procedures, reconstruct and/or stabilize the scaffold as necessary.

### Training Workers

Only trained and authorized persons should be allowed to use a scaffold. This training must be provided by a qualified person who understands the hazards associated with the type of scaffold being used and who knows the procedures to control or minimize those hazards. Training must include how to safely:

- Use the scaffold, handle materials on the scaffold and determine the maximum load limits when handling materials.
- Recognize and avoid scaffolding hazards such as electric shock, falls from heights, and being hit by falling objects.
- Erect, maintain and disassemble fall and falling object protection systems.

Erectors and dismantlers of tube and coupler scaffolds are at particular risk because their work starts before ladders, guardrails and platforms are completely installed. These workers must also be trained to:

- Recognize scaffold hazards.
- Properly erect, move, operate, repair, inspect, maintain and disassemble the scaffold;
- Identify the maximum load-carrying capacity and intended use of the scaffold.

Employers should train workers on the following safety factors:

- The shape and structure of the building to be scaffolded.

- Distinctive site conditions and any special features of the building structure in relation to the scaffold (i.e., overhead electric power lines or storage tanks). Also consider the proximity and condition of surrounding buildings.
- Weather and environmental conditions.
- Fall protection requirements for workers using scaffolds, such as guardrail systems or personal fall arrest systems.
- The type and amount of scaffold equipment needed to access all areas to be worked on.
- Proper storage and transporting of scaffolding components, materials and equipment.
- How to access the scaffold, (i.e., via ladders, stair rail systems, etc.).

Workers building scaffolds risk serious injury from falls and tip-overs, being struck by falling tools and other hazards, and electrocution from energized power lines.

To avoid scaffold hazards, employers must:

- Ensure that a competent person supervises and directs workers erecting, moving, dismantling, or altering a scaffold.
- Provide a safe means of access for each worker erecting or dismantling the scaffold. As early as possible, install hook-on or attachable ladders.
- Ensure that workers do not climb diagonal braces to reach the scaffold platform.
- Provide fall protection for workers erecting or dismantling the scaffold.
- Secure scaffolds to the structure during erection and dismantling.

For more information on scaffolding, see OSHA's Safety and Health Topics page at [www.osha.gov/SLTC/scaffolding](http://www.osha.gov/SLTC/scaffolding).

### Contact OSHA

For more information, to report an emergency, fatality or catastrophe, to order publications, to file a confidential complaint, or to request OSHA's free on-site consultation service, contact your nearest OSHA office, visit [www.osha.gov](http://www.osha.gov), or call OSHA at 1-800-321-OSHA (6742), TTY 1-877-889-5627.

## Worker Rights

Workers have the right to:

- Working conditions that do not pose a risk of serious harm.
- Receive information and training (in a language and vocabulary the worker understands) about workplace hazards, methods to prevent them, and the OSHA standards that apply to their workplace.
- Review records of work-related injuries and illnesses.
- File a complaint asking OSHA to inspect their workplace if they believe there is a serious hazard or that their employer is not following OSHA's rules. OSHA will keep all identities confidential.
- Exercise their rights under the law without retaliation, including reporting an injury or raising health and safety concerns with their employer or OSHA. If a worker has been retaliated against for using their rights, they must file a complaint with OSHA as soon as possible, but no later than 30 days.

For more information, see [OSHA's Workers page](#).

**This is one in a series of informational fact sheets highlighting OSHA programs, policies or standards. It does not impose any new compliance requirements. For a comprehensive list of compliance requirements of OSHA standards or regulations, refer to Title 29 of the Code of Federal Regulations. This information will be made available to sensory-impaired individuals upon request. The voice phone is (202) 693-1999; teletypewriter (TTY) number: 1-877-889-5627.**

**For assistance, contact us. We can help. It's confidential.**



**www.osha.gov (800) 321-OSHA (6742)**



U.S. Department of Labor